



Precise coordination of 3 motors

The Full-inverter control system well coordinates the running power of 3 DC motors between 20%~100% (averagely 50%), making them perfectly match each other to realize longer endurance.

Adjustable suction & running power

In different conditions, the Full-inverter control system will intelligently adjust the most suitable motor running speed to bring the best flow and cleaning effect with the lowest energy consumption.

1.5x Coverage Efficiency

Optimized path covers 1.5 times more area than random path for efficient and better pool cleaning performance

4 Cleaning Cycle Options

For various pool sizes, the robot offers 4 optional cleaning cycles (1h/1.5h/2h/Max) to satisfy different needs.

2 Cleaning Modes Selectable

Floor only; Floor/wall/waterline

Finer Filter Basket

120µm filter to collect finer debris

Auto Park

Auto park by the pool edge for easy pickup

Adjustable suction & running power

In different conditions, the Full-inverter control system will intelligently adjust the most suitable motor running speed to bring the best flow and cleaning effect with the lowest energy consumption.



1.5x Coverage Efficiency

Optimized path covers 1.5 times more area than random path for efficient and better pool cleaning performance

4 Cleaning Cycle Options

For various pool sizes, the robot offers 4 optional cleaning cycles (1h/1.5h/2h/Max) to satisfy different needs.



Precise coordination of 3 motors

The Full-inverter control system well coordinates the running power of 3 DC motors between 20%-100% (averagely 50%), making them perfectly match each other to realize longer endurance.

More Features



2 Cleaning Modes Selectable

Floor only; Floor/wall/waterline



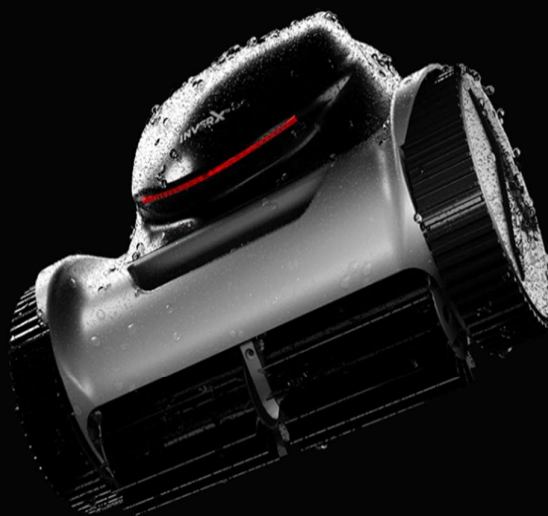
Finer Filter Basket

120μm filter to collect finer debris






Auto Park

Auto park by the pool edge for easy pickup



Specifications of X-Warrior Mini

Model	N55	N40	N25
Picture			
Performance condition reference: Floor mode in Liner pool			
Endurance time	5.5h	4h	2.5h
Charging time	5.5h	4h	2.5h
Pool size	6×10m	6×10m	6×10m
Optimum pool temperature	4~35°C	4~35°C	4~35°C
Cleaning mode	Floor only; Floor/wall/waterline		
Cleaning cycle	1h/1.5h/2h/Max	1h/1.5h/2h/Max	1h/1.5h/2h/Max
Filter capacity	3.2L	3.2L	3.2L
Filtration accuracy	120μm	120μm	120μm
Pump flow rate	18~15m³/h	18~15m³/h	18~15m³/h
Running power	20~100W	20~100W	20~100W
Moving speed	10m/min	10m/min	10m/min
Motor number	4	4	4
Charger Input	100-240VAC-50/60Hz		
Running voltage/current	25.2V/1A	25.2V/1.5A	25.2V/1A
Robot dimension	440mm*400mm*238mm	440mm*400mm*238mm	440mm*400mm*238mm
Robot N.W	6.5kg	6.2kg	6kg
Warranty	2 years	2 years	2 years